

Project		Catalog #		Type	
Prepared by		Notes		Date	



LUMARK

CWP COMPACT WALL PACK

Wall Mount Luminaire

PRODUCT FEATURES & CERTIFICATIONS




- INTERACTIVE MENU**
- Ordering Information [page 2](#)
 - Product Specifications [page 2](#)
 - Energy and Performance Data [page 3](#)

QUICK FACTS

- 24 configurations in each SKU!
- 4 Wattage selectable: 1,650 – 16,600 lumens
- 3 CCT selectable: 3000K-4000K-5000K, 80 CRI
- Selectable Dusk-to-Dawn Photocontrol with On/Off control
- Ultra thin 2.7” depth
- Easy snap-mount installation
- 120-347V, 50/60HZ

DIMENSIONAL DETAILS

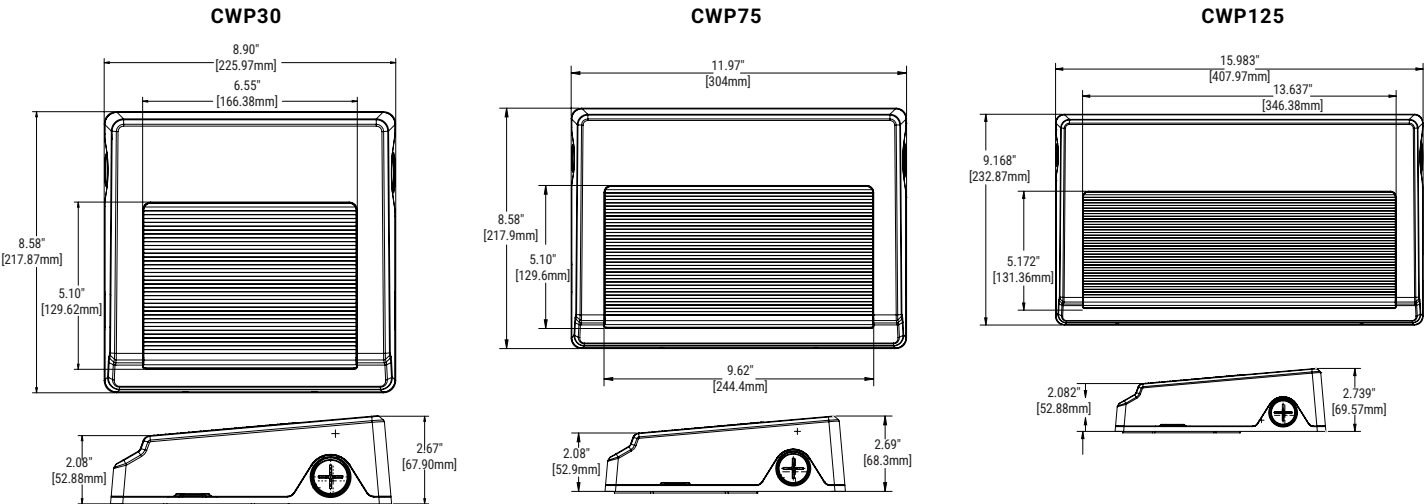

STOCK ORDERING INFORMATION

Model Number ¹	Wattage	Lumens	CCT Selectable	Voltage	Controls
CWP30-BZ=Compact Wall Pack, 30W, Bronze	30W-24W-18W-12W	1,640-4,100 lm	Selectable CCT: 3000, 4000, 5000 / 80CRI	120-347V, 50/60Hz	Selectable Dusk-to-Dawn via Button-type photocontrol
CWP75-BZ=Compact Wall Pack, 75W, Bronze	75W-60W-45W-30W	4,200-10,500 lm			
CWP125-BZ=Compact Wall Pack, 125W, Bronze	125W-100W-75W-50W	7,000-17,500 lm			
CWP30-BK=Compact Wall Pack, 30W, Black	30W-24W-18W-12W	1,640-4,100 lm			
CWP75-BK=Compact Wall Pack, 75W, Black	75W-60W-45W-30W	4,200-10,500 lm			
CWP125-BK=Compact Wall Pack, 125W, Black	125W-100W-75W-50W	7,000-17,500 lm			

NOTES:

1. Designlights Consortium® Qualified. Refer to designlights.org Qualified Products List under Family Models for details.

PRODUCT SPECIFICATIONS

Construction

- Die-cast aluminum housing with easy-mount snap-on enclosure

Optics

- Polycarbonate lens

Electrical

- Selectable SKUs offer 4 wattages selections and 3 CCTs (3000-4000-5000K) Default settings are highest wattage and 4000K CCT.
- Operating temperature range: -40°C to +40°C
- Power factor >0.9
- <20% THD (Total Harmonic Distortion)
- Class 2 driver incorporates internal fusing designed to withstand ±6kV surge

Controls

- Selectable configurations supply internal toggle switches to adjust luminaire CCT and lumens.
- Selectable luminaires will ship default at 4000K CCT and maximum lumen output.
- Selectable configurations also provide an integrated button-type photocontrol for dusk-to-dawn operation. The photocontrol is also field-adjustable via toggles switches to either enable, disable, or modify the settings. The photocontrol ships enabled.

Typical Applications

- Outdoor
- Parking lots
- Walkways
- Building Areas

Finish

- Bronze
- Black

Shipping Data

Unit Cartons:

- CWP30: 1.7 kg / 3.9 lbs
- CWP75: 2.4 kg / 5.2 lbs
- CWP125: 3.3 kg / 7.3 lbs

Master Cartons:

- CWP30: 29.8 lbs / 13.5 kg
- CWP75: 29.3 lbs / 13.3 kg
- CWP125: 43.4 lbs / 19.7 kg

Warranty

- Five-year limited warranty. Consult website for details. www.cooperlighting.com/legal

CWP PHOTOMETRIC PERFORMANCE TABLE

Lumcat	Input Watts	Luminaire Lumens	LPW	Type	B	U	G
CWP30 (12W-3000K)	11.9	1532.4	128.8	IV	B0	U3	G2
CWP30 (12W-4000K)	11.7	1632.3	139.5	IV	B0	U3	G2
CWP30 (12W-5000K)	12	1595.6	133.0	IV	B0	U3	G2
CWP30 (18W-3000K)	18.2	2288.3	125.7	IV	B0	U3	G2
CWP30 (18W-4000K)	17.8	2456.3	138.0	IV	B0	U3	G3
CWP30 (18W-5000K)	18.2	2391.2	131.4	IV	B0	U3	G2
CWP30 (24W-3000K)	24.3	3011.0	123.9	IV	B0	U3	G3
CWP30 (24W-4000K)	23.5	3195.1	136.0	IV	B0	U3	G3
CWP30 (24W-5000K)	24.2	3129.6	129.3	IV	B0	U3	G3
CWP30 (30W-3000K)	30.2	3675.3	125.0	IV	B0	U3	G3
CWP30 (30W-4000K)	30.3	4057.6	133.9	IV	B0	U4	G3
CWP30 (30W-5000K)	31.2	3982.0	127.6	IV	B0	U4	G3
CWP75 (30W-3000K)	29.5	3950.0	133.9	IV	B0	U4	G3
CWP75 (30W-4000K)	28.4	4220.0	148.6	IV	B0	U4	G3
CWP75 (30W-5000K)	29.4	4130.0	140.5	IV	B0	U4	G3
CWP75 (45W-3000K)	44.1	5700.0	129.3	IV	B0	U4	G4
CWP75 (45W-4000K)	43.1	6300.0	146.2	IV	B0	U4	G4
CWP75 (45W-5000K)	44.4	6130.0	138.1	IV	B0	U4	G4
CWP75 (60W-3000K)	59.7	7550.0	126.5	IV	B0	U4	G4
CWP75 (60W-4000K)	57.2	8250.0	144.2	IV	B0	U5	G5
CWP75 (60W-5000K)	59.2	8050.0	136.0	IV	B0	U5	G4
CWP75 (75W-3000K)	75.9	9433.2	125.0	IV	B0	U5	G5
CWP75 (75W-4000K)	73.1	10366.3	141.8	IV	B1	U5	G5
CWP75 (75W-5000K)	75.6	10143.3	134.2	IV	B1	U5	G5
CWP125 (50W-3000K)	50.4	6941.0	137.7	IV	B0	U4	G4
CWP125 (50W-4000K)	49.6	7586.5	153.0	IV	B0	U4	G4
CWP125 (50W-5000K)	50.4	7332.2	145.5	IV	B0	U4	G4
CWP125 (75W-3000K)	73.4	9951.3	135.6	IV	B1	U5	G5
CWP125 (75W-4000K)	71.9	10891.4	151.5	IV	B1	U5	G5
CWP125 (75W-5000K)	73.5	10588.4	144.1	IV	B1	U5	G5
CWP125 (100W-3000K)	95.3	12729.2	133.6	IV	B1	U5	G5
CWP125 (100W-4000K)	93.2	13971.4	149.9	IV	B1	U5	G5
CWP125 (100W-5000K)	95.4	13584.2	142.4	IV	B1	U5	G5
CWP125 (125W-3000K)	120.3	15837.8	131.7	IV	B1	U5	G5
CWP125 (125W-4000K)	117.3	17253.5	147.1	IV	B1	U5	G5
CWP125 (125W-5000K)	120.7	16841.5	139.5	IV	B1	U5	G5